Installation Manual for Toilet Seat and Cover

NB: This Installation manual is for the installer and must be followed in order for the seat to be fitted and work correctly.

Before beginning the installation of the seat, please check to make sure you have all of the seat components (1-6) shown below.

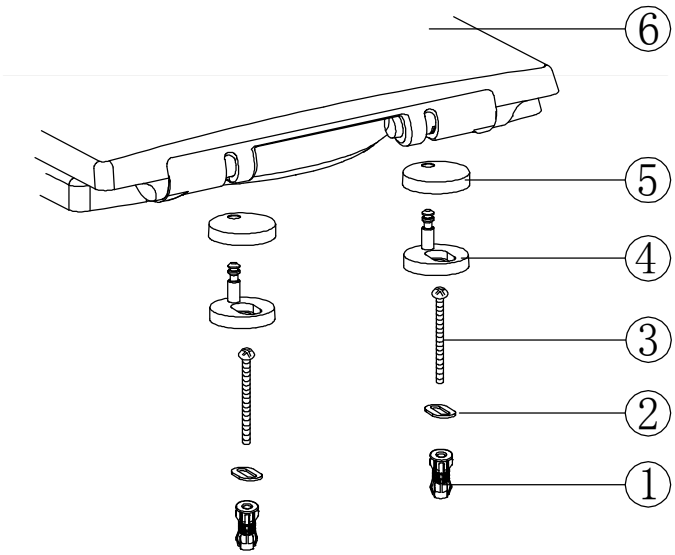

①	Hinge Anchor	④	Hinge
②	Adjustment Bracket	⑤	Hinge Lid
③	Screw	⑥	Toilet Seat & Cover

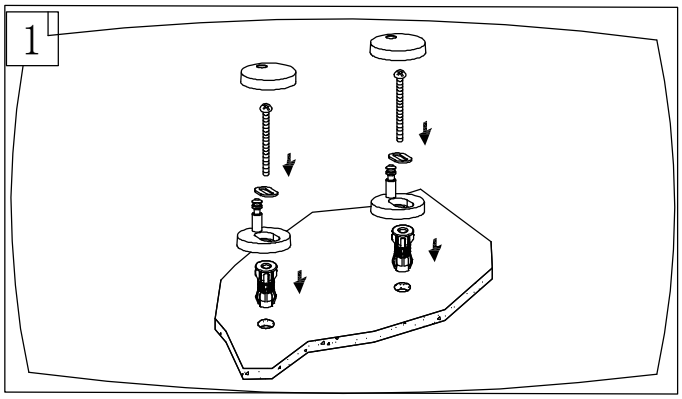

1. Insert adjustment bracket(2) into slot of seat hinge (4) and insert screw (3) into same slot.
2. Push hinge anchors (1) in through top of seat holes in WC pan.
3. Screw the hinge (4) into the hinge anchors (1) making sure to align seat to desired position before tightening.

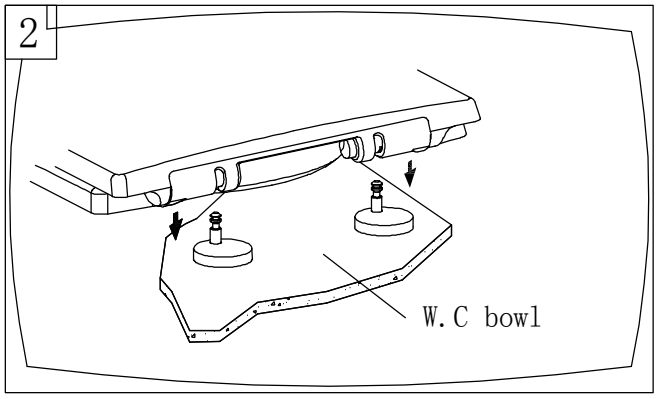

To fit the seat line up the toilet seat fixing holes with the pins on the hinge (4) and push down on the seat. (You will hear a "click" to indicate that the seat is fitted correctly)

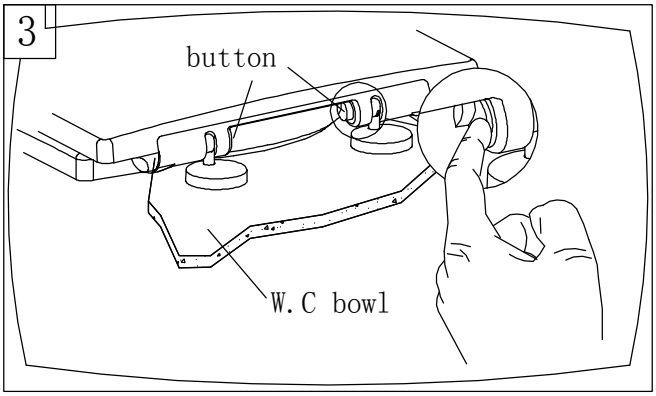

4. To remove the toilet seat press the two buttons on the seat next to the hinge and lift seat.

Note:

Please contact your branch of purchase if any parts are missing

DO NOT use sharp or coarse materials or any corrosive products to clean the seat.